

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 August 2004 (12.08.2004)

PCT

(10) International Publication Number
WO 2004/067902 A1

(51) International Patent Classification⁷: **E21B 17/043**

(21) International Application Number:

PCT/SE2004/000085

(22) International Filing Date: 26 January 2004 (26.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0300211-0 30 January 2003 (30.01.2003) SE

(71) Applicant (for all designated States except US): **ATLAS COPCO ROCK DRILLS AB** [SE/SE]; S-701 91 Örebro (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KANFLOD, Morgan** [SE/SE]; Runabyvägen 32, S-705 92 Örebro (SE). **ÖBERG, Fredrik** [SE/SE]; Restalundsvägen 75, S-702 16 Örebro (SE). **STENBERG, Bertil** [SE/SE]; Räntmästargatan 71, S-702 25 Örebro (SE).


(74) Agent: **GRUNDFELT, Gunnar**; Atlas Copco Rock Drills AB, Patents, S-701 91 Örebro (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **COUPLING SLEEVE FOR CONNECTION OF A THREADED ROCK BOLT TO AN IMPACT ROCK DRILLING MACHINE**

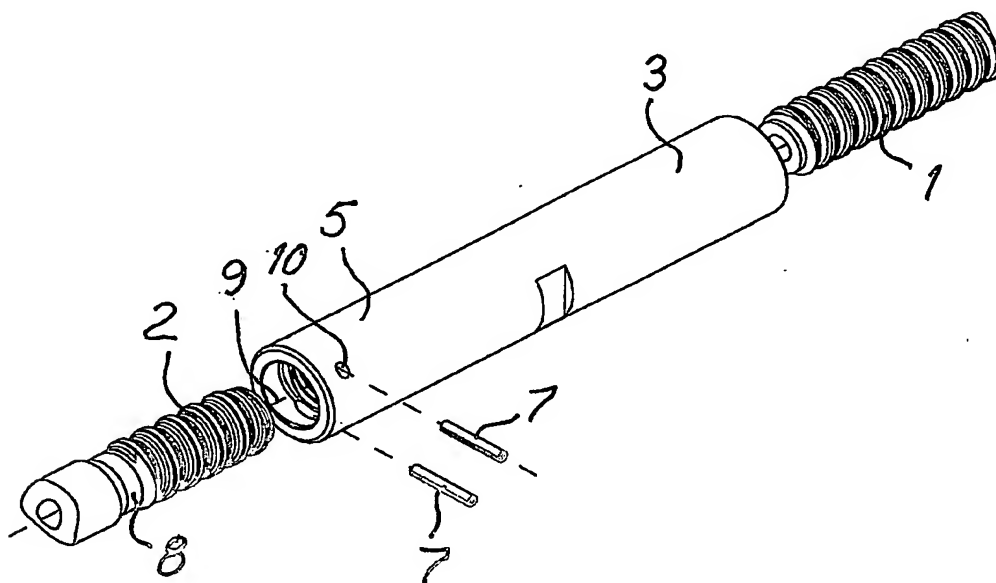

(57) Abstract: Coupling sleeve for connecting a threaded rock bolt (1) to an impact rock drilling machine (2) comprising a first part (3) provided with an internal thread (4) for connection of the rock bolt (1) and a second part (5) provided with an internal thread (6) for connection of the rock drilling machine (2), whereby the second part (5) comprises a transversely to a longitudinal axis (9) on the coupling sleeve arranged locking device (7) which cooperates with a region (8) on the rock drilling machine (2) for preventing that the coupling sleeve and the rock drilling machine (2) are separated.